


► Spool Retainer (PSRZ)



Material :- En-8
Hardness :- 38-42HRC
Surface Treatment :- Blackodised

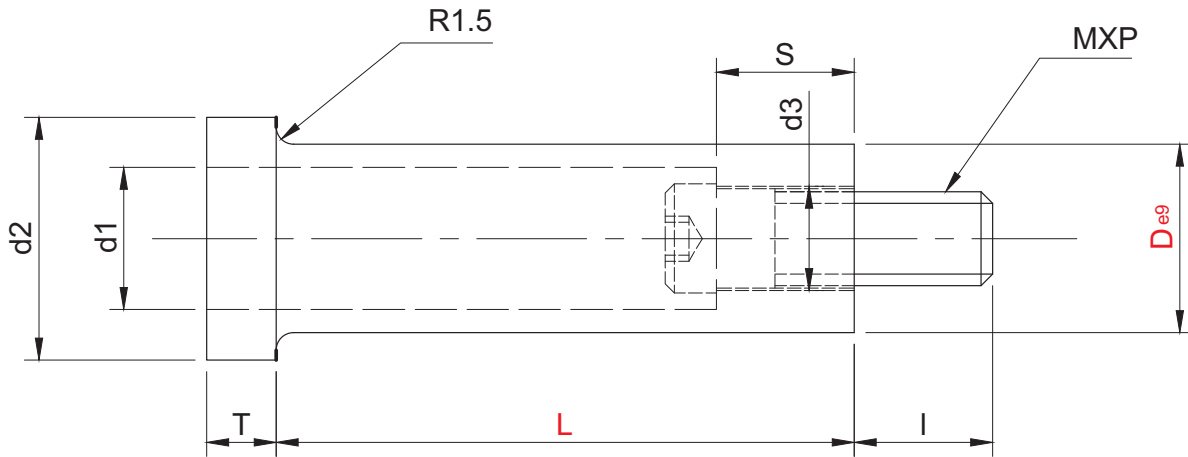

| Type | De9 | d1 | d2 | d3 | MXP | Provided bolt | T | S | I | D | L | |
|------|-----|----------------------|----|----|---------|---------------|------------|----|----|----|------------------------|-----------------------------|
| PSRZ | 20 | (-0.040) (-0.092) | 15 | 26 | 9 | 8X1.25 | CB 8 - 35 | 6 | 20 | 15 | 20 | 40 50 60 70 80 90 |
| | 24 | | 18 | 33 | 11 | 10X1.5 | CB 10 - 45 | 6 | 25 | 20 | 24 | 50 60 70 80 90 100 |
| | 28 | 20 | 37 | 13 | 12X1.75 | CB 12 - 50 | 8 | 30 | 20 | 28 | 50 60 70 80 90 100 110 | |
| | 35 | (-0.050) (-0.112) | 26 | 47 | 17 | 16X2.0 | CB 16 - 60 | 8 | 35 | 25 | 35 | 60 70 80 90 100 110 120 130 |
| | 44 | | 32 | 57 | 21 | 20X2.5 | CB 20 - 70 | 8 | 40 | 30 | 44 | 70 80 90 100 110 120 130 |

Order Type :- Code X D X L
Example :- PSRZ X 20 X 50